



The publication does not constitute a commercial offer. It is not a basis for submitting complaints. Presented photographs are illustrative pictures, not actual product photos.

Table of contents

PVC panels ALU Wood	p. 04-130
Types of infill	p. 131-132
Glazing in panels	p. 133-134
EkoVitre glass panels	p. 135-137
ClassicLine embossed PVC panels	p. 138-141
ClassicLine embossed PVC panels Accessories	p. 138-141 p. 142-151

0

Entrance doors

Modern design, freedom in selection of accessories and a wealth of colours make the entrance door a remarkable showcase of any home.

The highest quality materials used during the porduction process are a guarantee of comfort, safety and durability for many years.



We have prepared more than 100 designs to choose from. The state-of-the-art technologies used in the manufacturing ensure high resistance to outdoor conditions and easy care. We also offer to manufacture doors following the client's own design, while suggesting optimum design solutions.



A combination of popular designs with the durability of aluminium. The customer can choose the design, thickness, colour, and infill. AluLine gives almost unlimited possibilities. What's more, customers can create their individual and unique door design and provide the building with an exceptional look.



WoodLine was created for the enthusiasts of modern and practical solutions based on traditional materials. There are slightly simpler, milled door designs or models with glazing to choose from. With high quality coatings, doors offer resistance to outdoor conditions as well as easy care.



Everlasting elegance, plentiful interior design possibilities and increasing performance of glass attract the interest of designers all around the world. This prompted us to create an exclusive, timeless line of glass door panels, EkoVitre.

ClassicLine Embossed panels

ClassicLine combines classic elegance with a hint of luxury. The collection of panels is designed for PVC joinery that charms every owner with its unique shapes and colours. When we created ClassicLine, we endeavoured to combine the comfort of use with functionality and unique aesthetics.




Panel Models

The customers may choose one of the models we offer or suggest their own. Nothing prevents us from manufacturing doors according to a design prepared by the customer.

However, the design must meet structural requirements.

We also propose decorations of stainless steel, flush with the panel surface, easier in daily care.

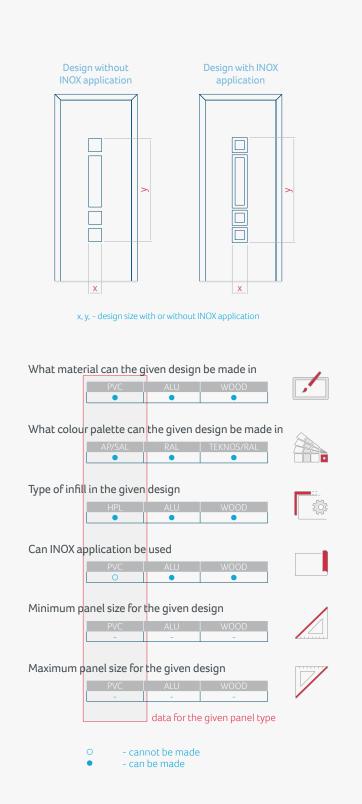





EkoAluWoodLine


PVC | ALU | WOOD panels


We prepared a wide range of designs. The state-of-the-art technologies used in the manufacture ensure high resistance to outdoor conditions and easy care. We also offer to manufacture doors according to the Client's design, while suggesting optimum design solutions.
























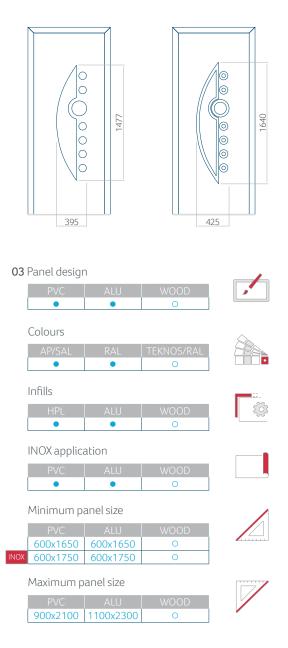













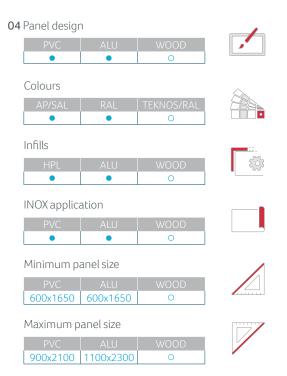























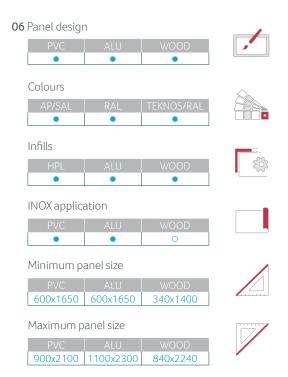







































10 Panel design





900x2100 1100x2300 840x2240












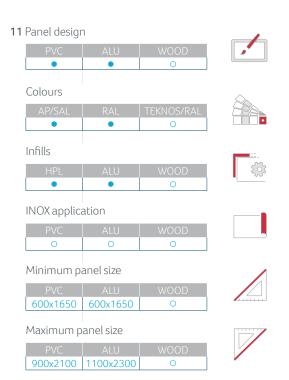









900x2100 1100x2300 840x2240















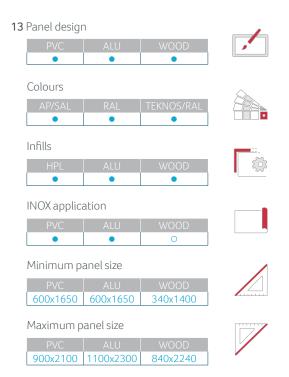






















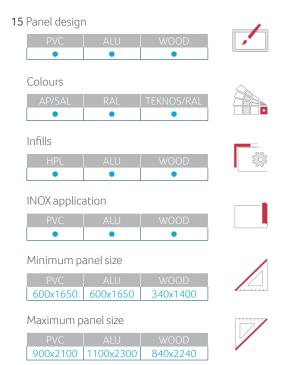



1500 450


16 Panel design











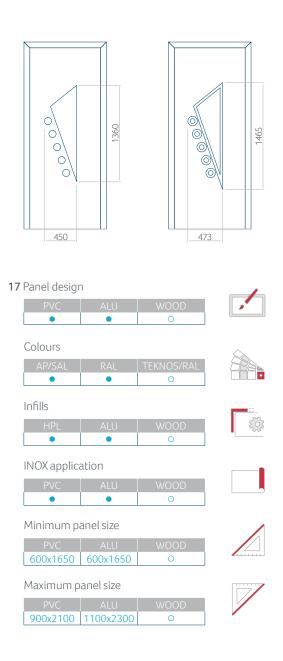












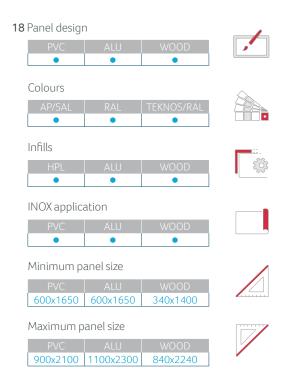

















		7	
]		
			1500
]		
350			

	1
	1530
488	

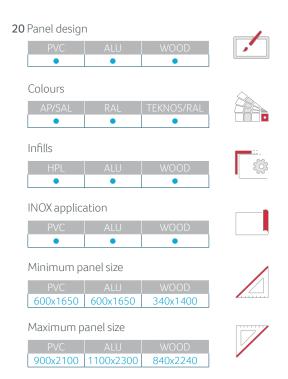










View from the outside


900x2100 1100x2300 840x2240


The external view of the panel does not change when the handle is changed.









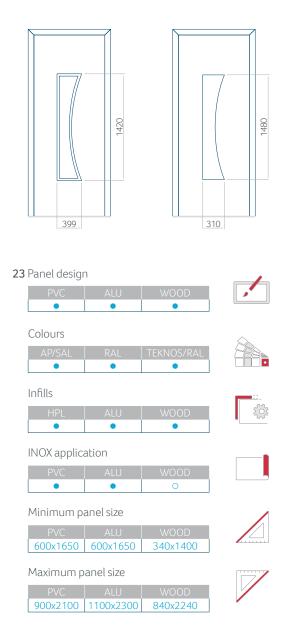








View from the outside The external view of the panel does not change when the handle is changed.

PVC | ALU | Wood








900x2100 1100x2300 840x2240





We provide our customers with two infill types – polyurethane foam and plywood or XPS extruded polystyrene, each available with thicknesses of 24, 36 and 48 mm. Panels, depending on customer preferences and technical requirements, are made of HPL plates or aluminium sheet metal. HPL plates are covered with veneer, and sheet metal is coated. However, in wooden doors we offer panels with thicknesses of 24, 36 and 46 mm.


Þ








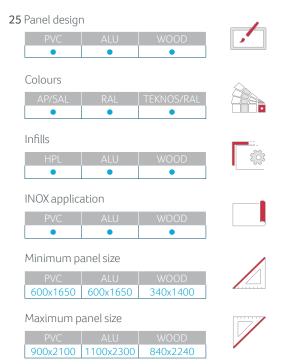



















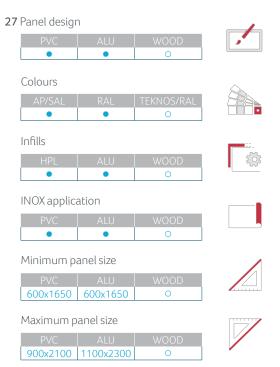


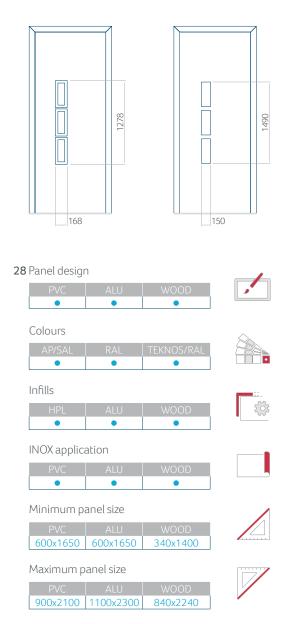









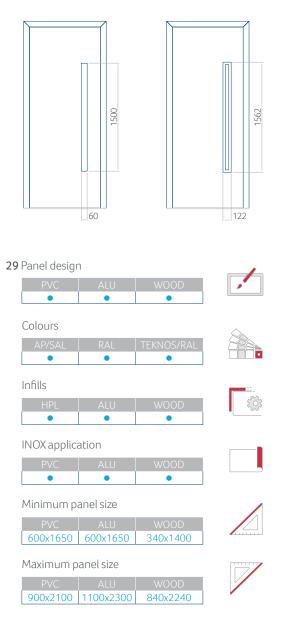













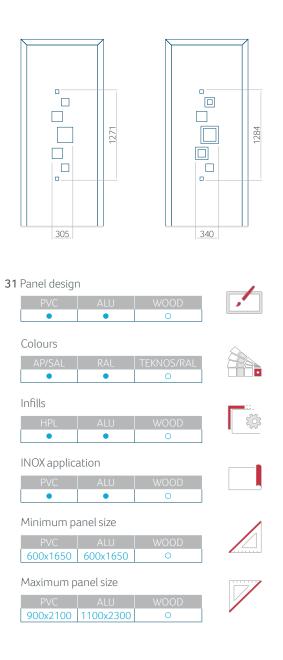


PVC | ALU | Wood



























































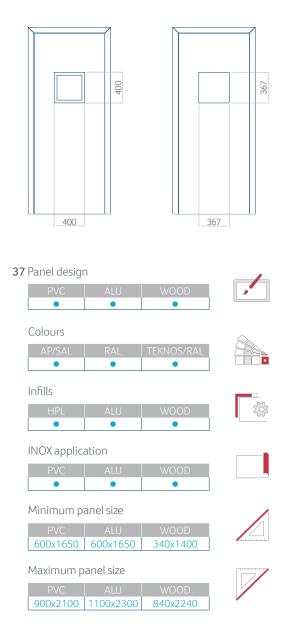
























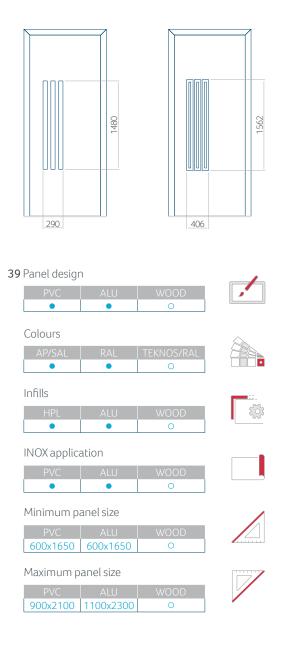


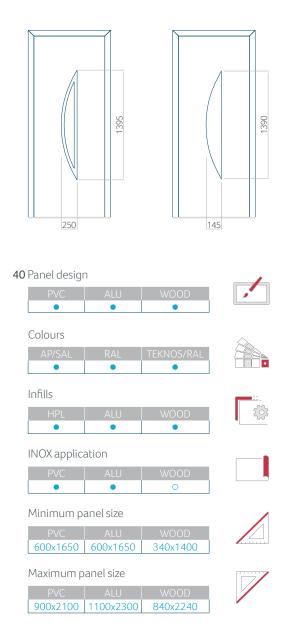







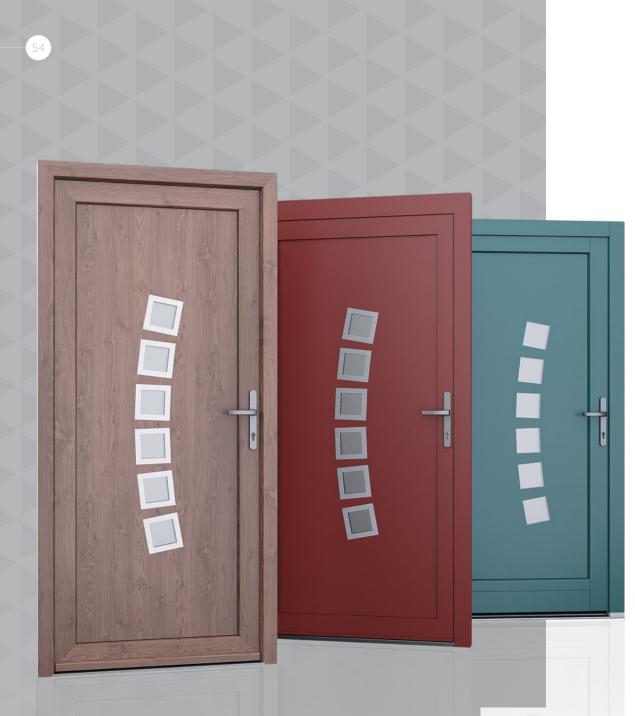

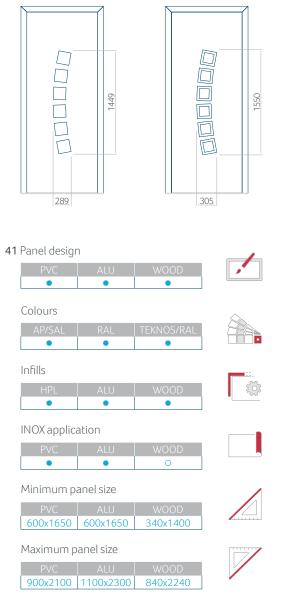
















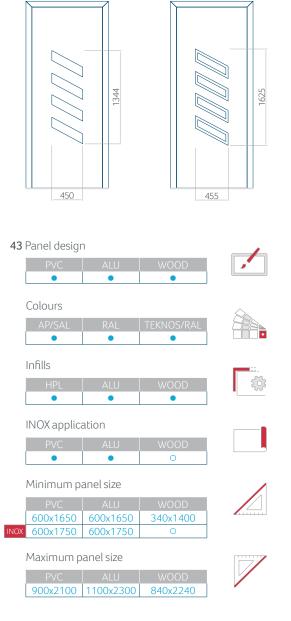
















352	1496	350	1495
45 Panel desigr			
PVC	ALU	WOOD	,
Colours AP/SAL	RAL	TEKNOS/RAL	
Infills			
HPL	ALU •	WOOD •	ŢŢ.
INOX applic	ation		
PVC •	ALU •	WOOD O	
Minimum p	anel size		
PVC 600x1650	ALU 600x1650	WOOD 340x1400	
Maximum panel size			
PVC 900x2100	ALU 1100x2300	WOOD 840x2240	












































View from the outside


900x2100 1100x2300 840x2240


The external view of the panel does not change when the handle is changed.











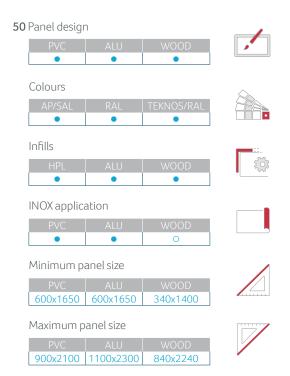



















525
















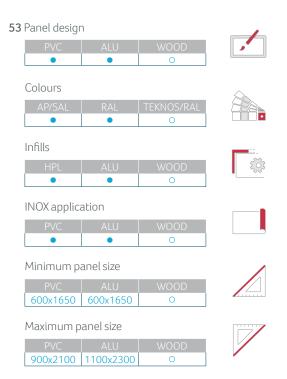


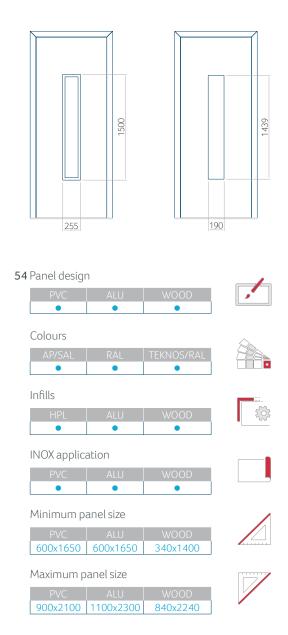












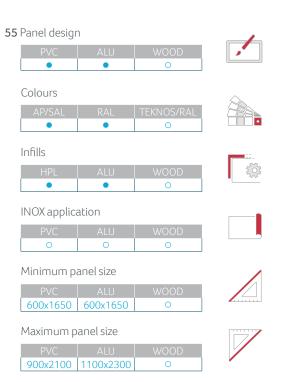














The panel is available in a version with a smaller corrugation width (6 mm), without inox application panel design 111, however this design in a wood panel has a corrugation width of 4 mm. 57 Panel design • Colours Infills • - x1650




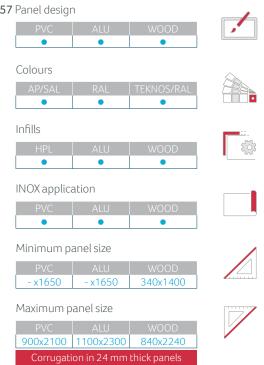



The panel is available in a version with a smaller corrugation width (6 mm), without inox application panel design 112, however this design in a wood panel has a corrugation width of 4 mm.

58 Panel design

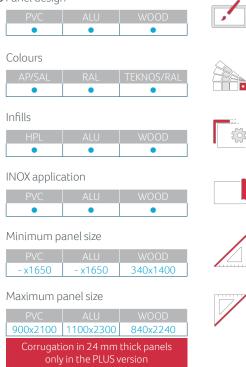

View from the outside


The external view of the panel does not change when the handle is changed.






(73






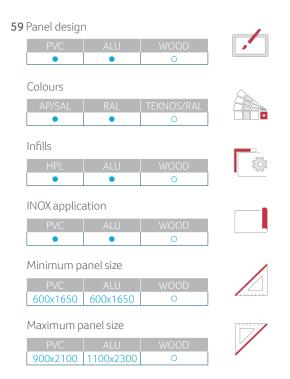



PVC | ALU | Woo








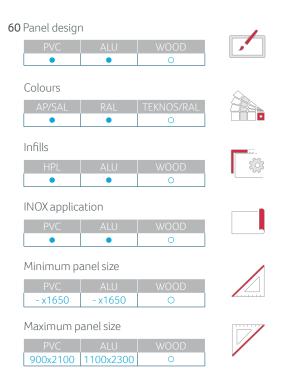


















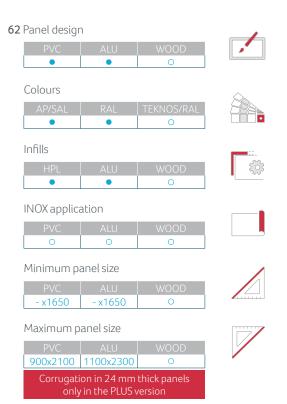
















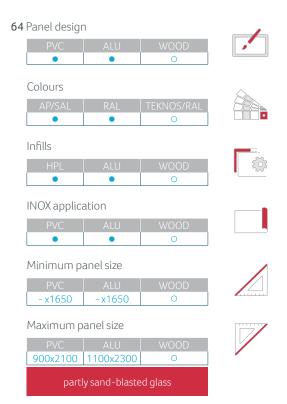




65 Panel design










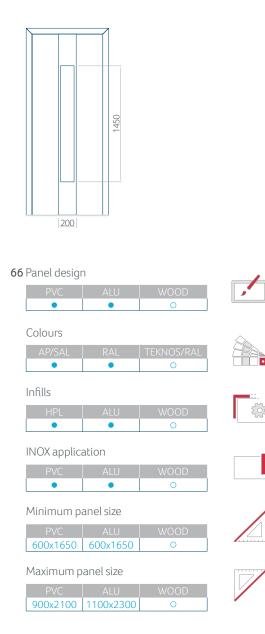











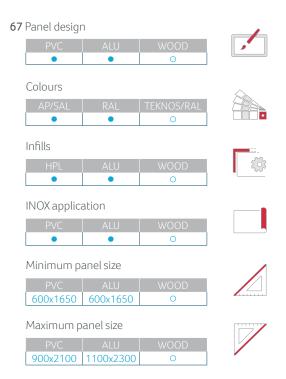


















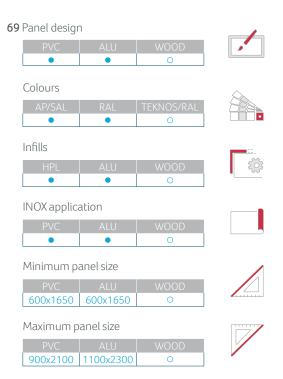
















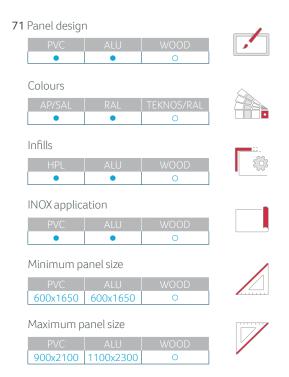

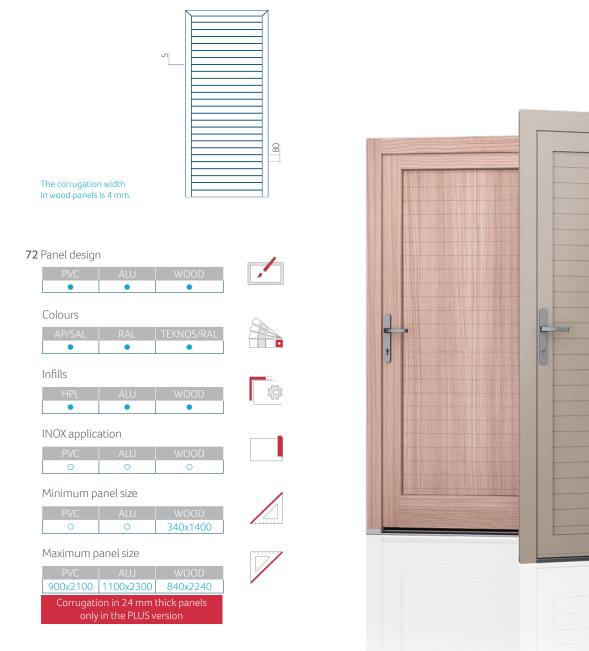


View from the outside

The external view of the panel does not change when the handle is changed.









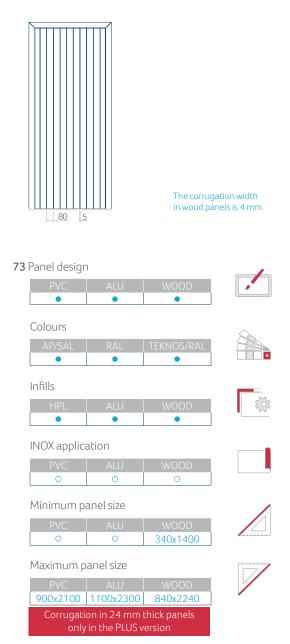




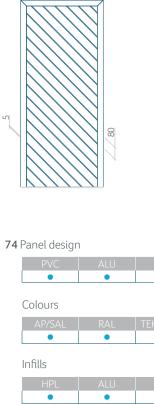



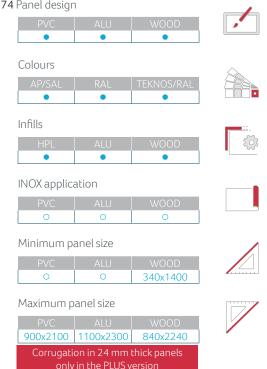

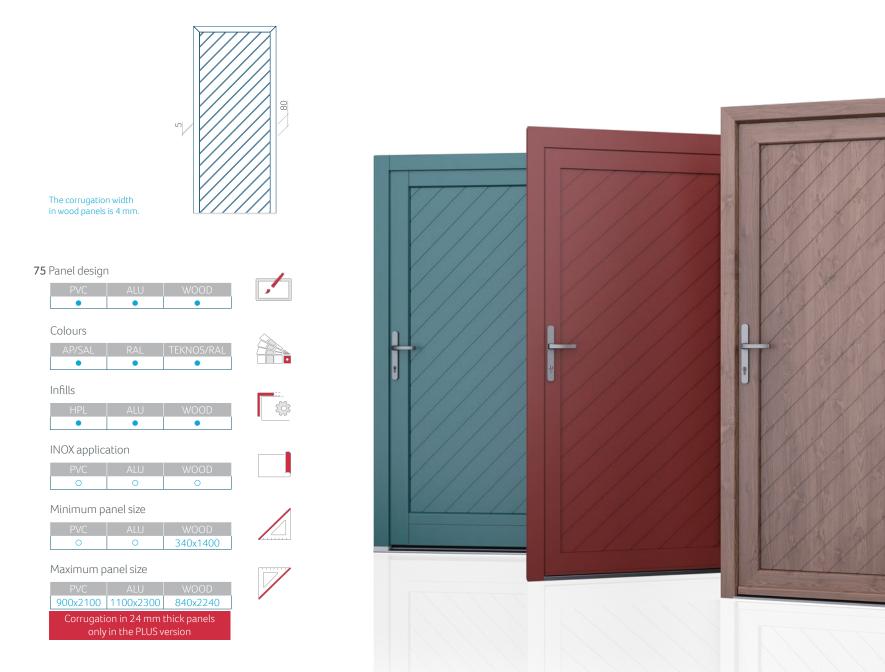


View from the outside

The external view of the panel does not change when the handle is changed.







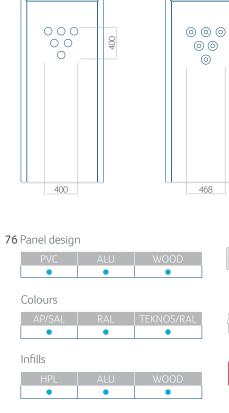


468


,/







77 Panel design







View from the outside


900x2100 1100x2300 840x2240

The external view of the panel does not change when the handle is changed.



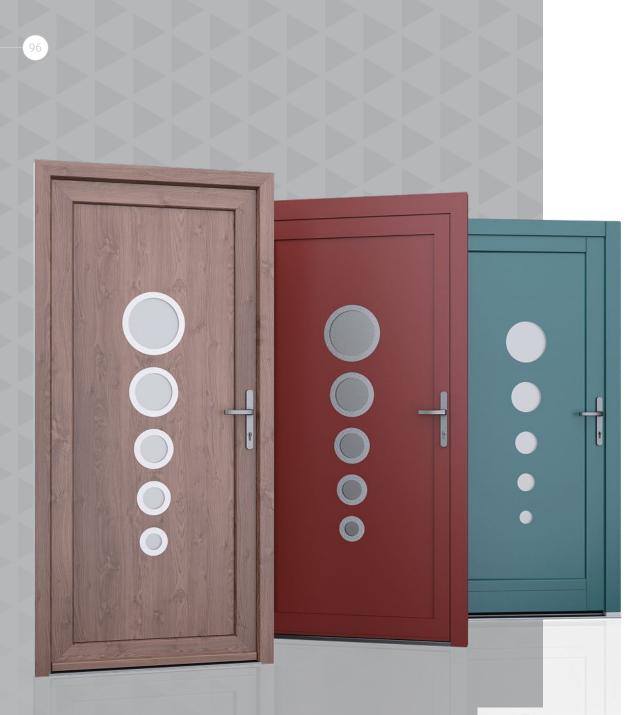

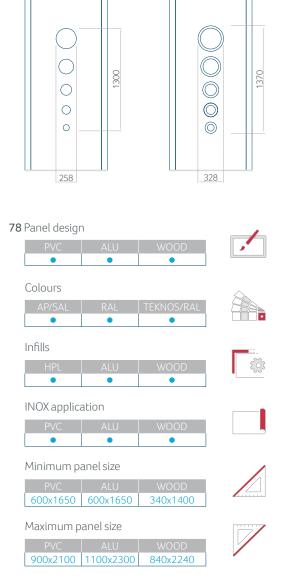


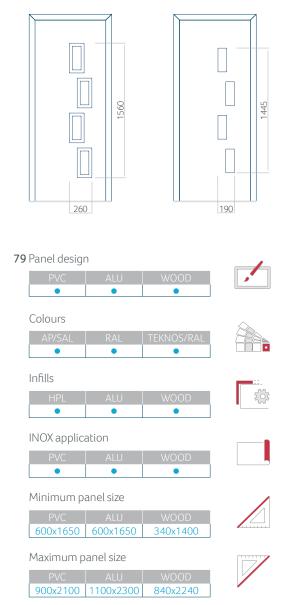









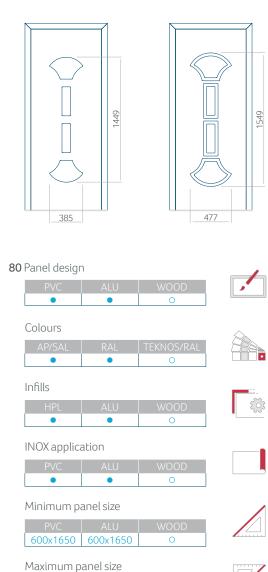















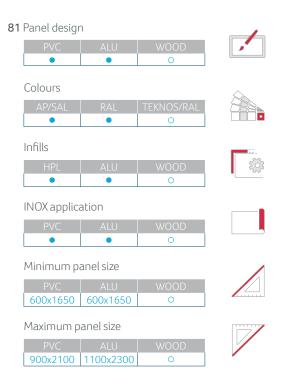






82 Panel design


535

















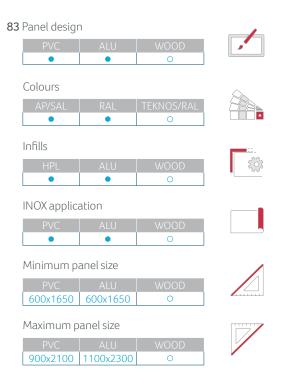














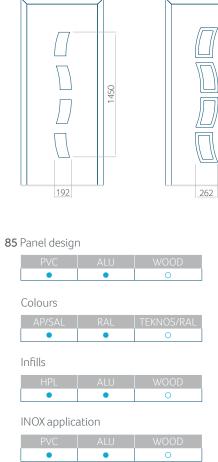


560

,




We provide our customers with two infill types – polyurethane foam and plywood or XPS extruded polystyrene, each available with thicknesses of 24, 36 and 48 mm. Panels, depending on customer preferences and technical requirements, are made of HPL plates or aluminium sheet metal. HPL plates are covered with veneer, and sheet metal is coated. However, in wooden doors we offer panels with thicknesses of 24, 36 and 46 mm.

900x2100 1100x2300





86 Panel design







View from the outside

The external view of the panel does not change when the handle is changed.










87 Panel design





900x2100 1100x2300 840x2240














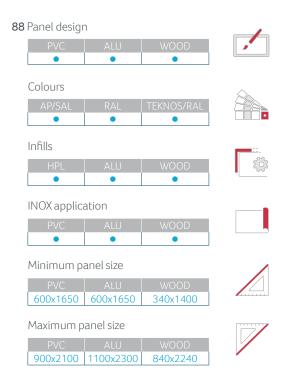












View from the outside The external view of the panel does not change when the handle is changed.
















91 Panel design







View from the outside The external view of the panel does not change when the handle is changed.


900x2100 1100x2300 840x2240





















View from the outside The external view of the panel does not change when the handle is changed.






Ν			N	
		899		210
94 P	'anel desigr	1		
	PVC	ALU	WOOD	
	Colours AP/SAL	RAL	TEKNOS/RAL	
I	nfills			
	HPL •	ALU	WOOD •	्रि
11	NOX applica	ation		
	PVC •	ALU •	WOOD •	
Ν	/linimum pa	anel size		
	PVC 600x1650	ALU 600x1650	WOOD 340x1400	
Ν	∕laximum p	anel size		


900x2100 1100x2300 840x2240







	1498
228	



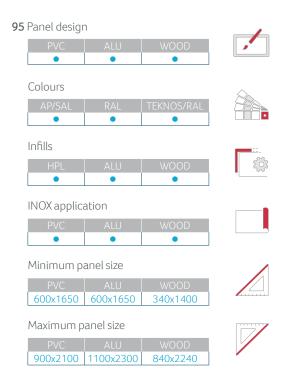



96 Panel design








View from the outside The external view of the panel does not change when the handle is changed.

























View from the outside The external view of the panel does not change when the handle is changed.




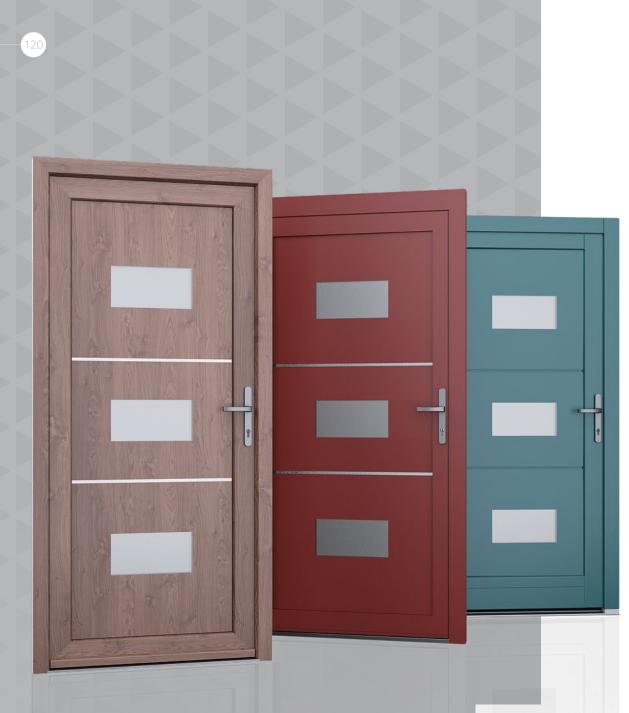







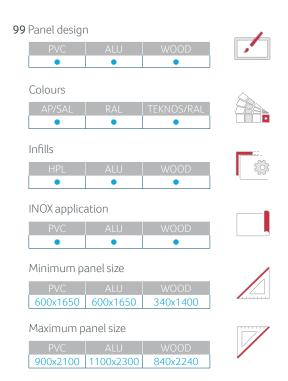





100 Panel design






View from the outside The external view of the panel does not change when the handle is changed.










101 Panel design


430











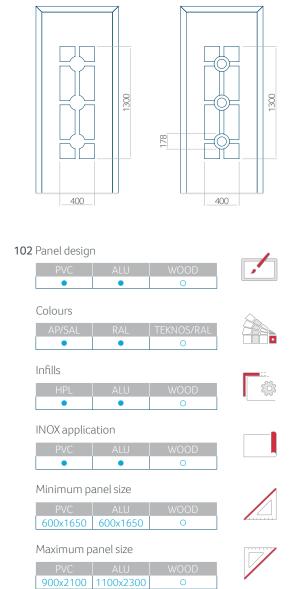





103 Panel design







View from the outside The external view of the panel does not change when the handle is changed.





900x2100 1100x2300








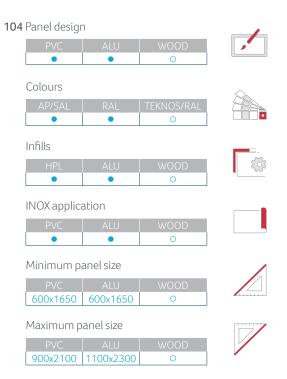










View from the outside The external view of the panel does not change when the handle is changed.






	1280	
248		




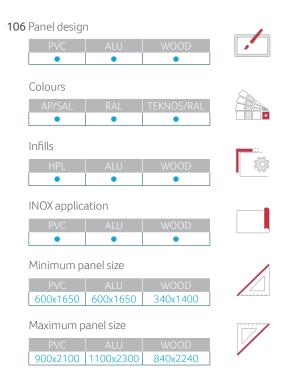



The panel is available in a version with a smaller corrugation width (6 mm), without inox application - panel design 109, however this design in a wood panel has a corrugation width of 4 mm.

107 Panel design

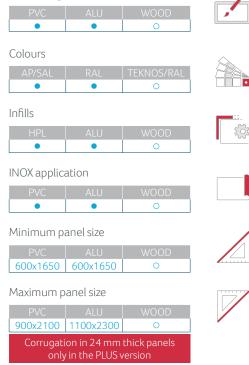


View from the outside

The external view of the panel does not change when the handle is changed.





The panel is available in a version with a smaller corrugation width (6 mm), without inox application - panel design 110, however this design in a wood panel has a corrugation width of 4 mm.

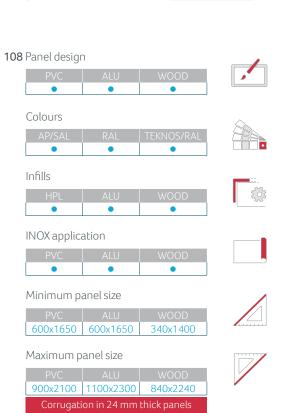

15



Stainless steel is flush with the panel surface. This solution is especially recommended for customers who are not only looking at the appearance of the door panels, but also at their practical aspects. Flush adornments are much easier in everyday care.



For the Client's who are looking for panels with more subdued decorations, we recommend grooved door panels. Grooves give the door an original look and create a noticeable and spatial structure.

13





We provide our customers with two infill types – polyurethane foam and plywood or XPS extruded polystyrene, each available with thicknesses of 24, 36 and 48 mm.

Panels, depending on customer preferences and technical requirements, are made of HPL plates and aluminium sheet metal. HPL plates are covered with veneer, while sheet metal is coated (RAL colour palette).

With the panel structure, they form perfect thermal and acoustic insulation.

Panel Classic

XPS extruded polystyrene


HPL or aluminium

Panel Plus



XPS extruded polystyrene

plywood

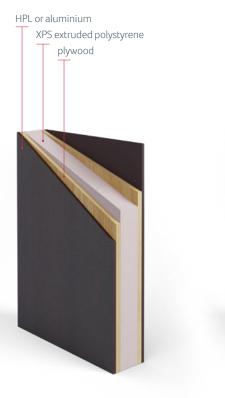

panel thickness • 24 mm [9/6/9],

- 36 mm [9/18/9],
- 46 mm [9/30/9]

panel thickness • 24 mm [2/20/2], • 36 mm [2/32/2],

• 48 mm [2/44/2]

panel thickness
24 mm [2/6/8/6/2],
36 mm [2/6/20/6/2],
48 mm [2/6/32/6/2]

We offer a wide range of glass with a motif, made of transparent glass, and ornamental vanes in the most popular designs. Ornamental glass is recommended for houses, offices, shops, hotels, and restaurants. It provides intimacy and brightens the interior.



float sandblasted



Altdeutsch



Chinchila white



Crepi



Delta white



Parsol brown



Waterdrop



Tarassa



Master point




Stopsol grey





By default, door glazings are made of opaque glass. In 24 mm thick panels, we use safety glass on the outside. In 36 and 48 mm thick panels, glazing is made of safe glass on both sides.

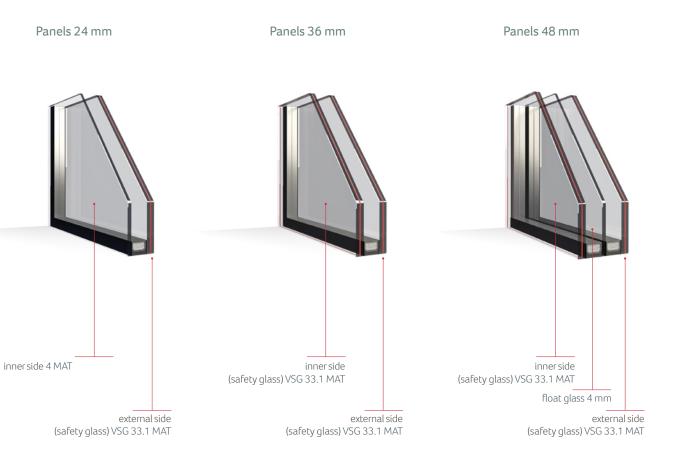




EkoVitre Glass panels


Everlasting elegance, plentiful interior design possibilities and increasing performance of glass attract the interest of designers all around the world. This prompted us to create an exclusive, timeless line of glass door panels, EkoVitre.









EkoVitre is not only style, but also safety and high-energy efficiency. The panels are made of two VSG glass vanes, in which one has sand-blasted patterns. The space between the vanes is filled with noble gas. The panels have a thickness of 36 mm.

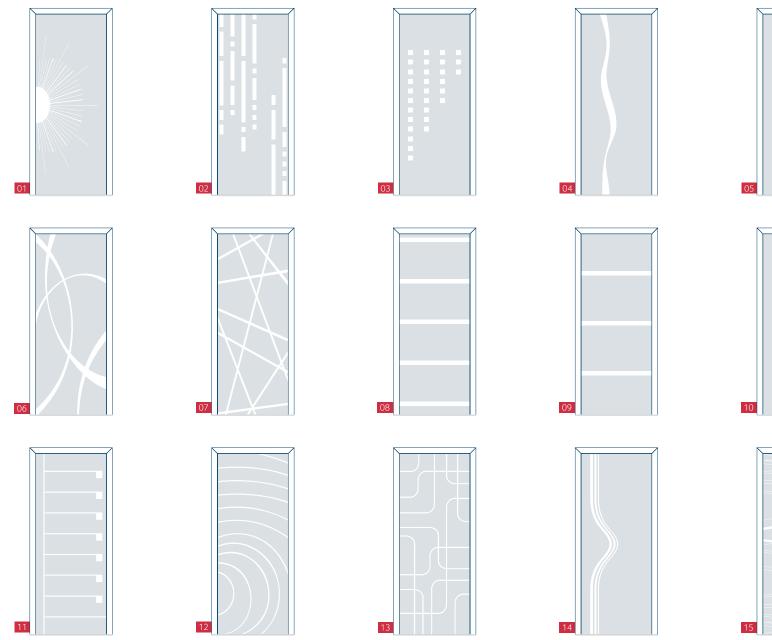







ClassicLine Embossed panels

The collection of panels is designed for PVC joinery that charms every owner with its unique shapes and colours. When we created ClassicLine, we endeavoured to combine the comfort of use with functionality and unique aesthetics.

Door infill manufactured based on PVC Renolit and Hornschuch film and special HIDROFUGO-Finsa plate, resistant to outdoor factors (special construction plate), Kleiberit adhesive (thermal resistance -40/130°C) and polyurethane plate*.

- heat transfer coefficient 0.74*** (certified) W/(m2•K)
- glass infill [24 mm] U= 1.0 W/(m2•K)
- internal infill of polyurethane foam* λ = 0.022 W/(m2•K)
- internal and external layers made of HIDROFUGO plate 6 mm
- panel thickness 36 mm and 48 mm



* PUR thickness 24 mm for panel thickness 36 mm XPS thickness 36 mm for panel thickness 48 mm ** solid panel without glazing

















Possibility of using glazing in particular models. Configuration agreed individually.

Embossed panels can be made in colours of the Aluplast or Salamander palette. The list of colours is on p. 152-153. The panel can be veneered on one or two sides, colour configuration can be adjusted, as preferred.





Ţ

Maxin	num p	anel size	
P١	/C		M
1100	<2300	-	



05 Sarda 06 Oceano 07 Zefiro 08 Verde

- 09 Acqumarina

- 13 Zinco
- 14 Yvonne
- 15 Carpa
- 16 Clara
- (17) Claudia
- 18 Cristi
- 19 Siluro
- (20) Azzurrite
- 21 Giulla



Accessories

Our collection of door accessories are top-class products that constitute not only a functional, but also an aesthetic feature. Doors are equipped with a series of accessories, which make their everyday use more efficient.

Standard handle

- white
- brown
- cream
- silver
- gold





Drill-proof door handle and knob

Available colours

• INOX




Door knob

Available colours

- white
- brown
- cream
- silver
- gold



Door handle and knob



ALU WOOD

•

Available colours







Handle on a short backplate, with anti-drill insert

Available colours • INOX



PVC O

Peephole

•	•	•

Available colours • INOX

ALU WOOD





Access control

PVC ALU WOOD

- fingerprint reader,code keypad,bluetooth

- RFID



Door mail slot



Available colours

- white
- silver gold



PVC

•

ALU WOOD

0

Hinge

Dr. Hahn

Available colours

- white
- brown
- cream
- silver
- gold



Hinge SFS

Available colours

- white
- cream
- brown
- dark brown
- gold
- silver



٠

•

Hinge JOCKER

Available colours

- white
- brown
- silver
- gold
- cream
- black
- anthraciteINOX (supplement)



Wala WR - roller hinge



Available colours

- white
- brown
- silver
- in the colour of the joinery







Hinge WALA WX

PVC	ALU	WOOD
0	•	0

Available colours

- white
- brown
- silver
- in the colour of the joinery



0

•

Hinge SFS Easy 3D

Available colours

- white
- brown
- silver
- in the colour of the joinery



Concealed hinge KFV AXXENT

PVC	ALU	WOOD
0	•	0
MB 70 i ME	386	

Available colours

- white
- silver
- gold



Cylinder class C



- Anti-burglary class C, the highest degree of anti-burglary protection
 reserved key profile, key copying based on safety card





Door closer GEZE

PVC		
	•	

Available colours

- dark brown
- white
- silver



GEZE Boxer

 concealed door closer (optional blocking mechanism)





Door closer with or without blocking mechanism G-U



Available colours

- dark brown
- white
- silver




Espagnolette motor G-U Secury Automatic



- for engaging the deadbolts that jump in automatically
- the control cable enables connecting an intercom or access control components
- can be used in 1- and 2-leaf doors

 \Diamond



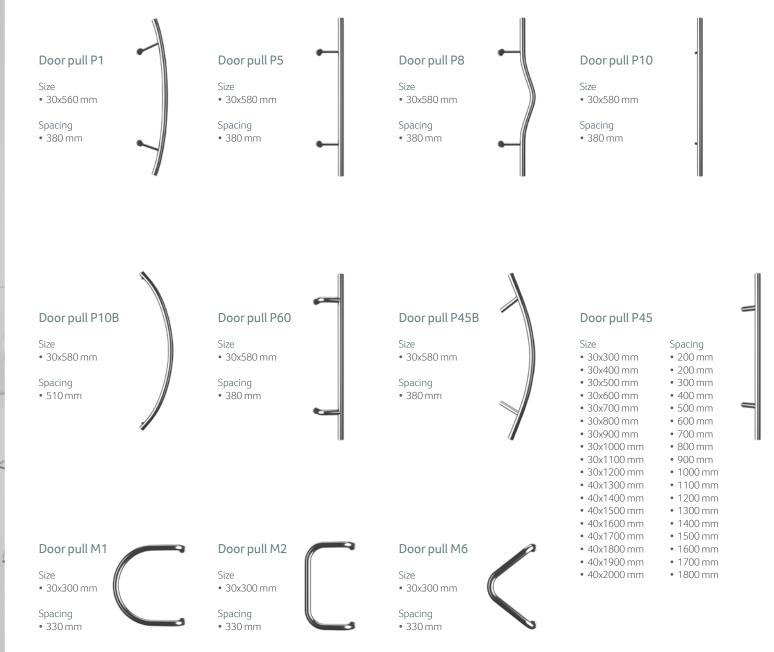

PVC	ALU	WOOD
٠	•	•


SECURY AUTOMATIC espagnolette


GIJ

•

Standard door equipment ensures the comfort of use, safety and functionality.

- automatic bolting ensures a regular compression on the entire leaf height
- option to use an electric motor, working with any opening system
- option to use a rigid chain
- option to select an additional lock
- option to select an espagnolette with TE function, which enables engaging or disengaging automatic bolting at any moment. This function is connected to a lock barrel.

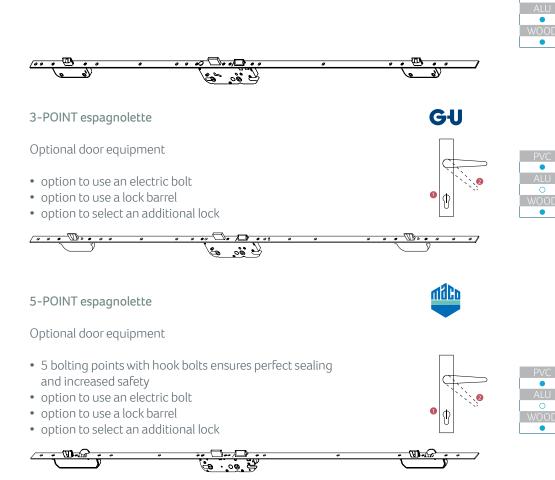

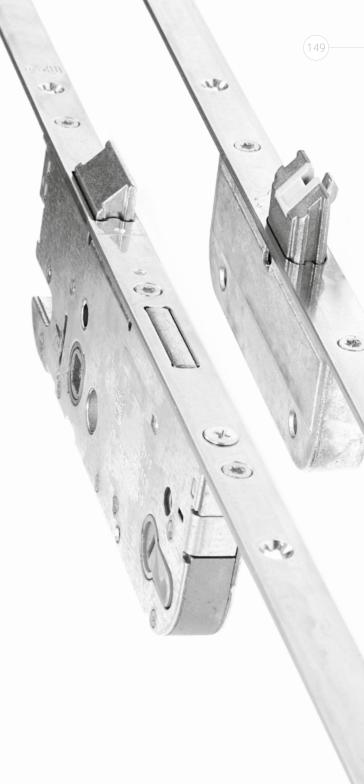



KFV 2600 espagnolette



Key-operated multi-point KFV espagnolettes are bolted and unbolted by turning the key twice.

- 5 bolting points
- highest safety
- steel circular pinbolts with hookbolts ensure perfect sealing and increased safety
- option to use a latch strip
- option to use an electric bolt
- option to use a bolting sensor
- option to use a barrel





KFV 2750 espagnolette

SIEGENIA[®]

With triple closing, AS 2750 permanently protects doors from deformation and increases safety, including when doors are not bolted. After the key is turned in the lock, a massive hook and deadbolt mechanism with the saw-resistant deadbolt of the main lock ensure efficient anti-burglary protection.

- option to use a latch strip + option with 3 electric bolts
- option to use a rigid chain



Dedicated door protections, safety guarantee for you and your family.



152

Sector Sector

1

Colour palette





Colours in embossed panels AP 05, AP 06, AP 23, AP 27, AP 30, AP 34, AP 40, AP 44, AP 50, AP 60, AP 63, AP 65, AP 75, AP 79, AP 88, AP 94



Colours in embossed panels SAL 27, SAL 37, SAL 39, SAL 41, SAL 43, SAL 59, SAL 69, SAL 70, SAL 88, SAL 90

 \Diamond



SALAMANDER WINDOW & DOOR SYSTEMS






Available colours from the TEKNOS and RAL colour charts. It is possible to apply matt coating.



Installation

Entrance doors are the barrier beyond which the outside world ends and our inside, harmonious world begins. Sometimes, however, this harmony is disturbed by cold air coming inside. The cause of the incoming cold air erroneously turns out to be the wrong choice of the door.

The installation of a warm threshold is available in two versions. The customer may choose installation with insulation material – PURENIT or installation on PVC system extension. Regardless, in both cases the customer will receive proper thermal insulation below the flooring. This solution prevents thermal bridges and thus the influx of cold air to the inside.

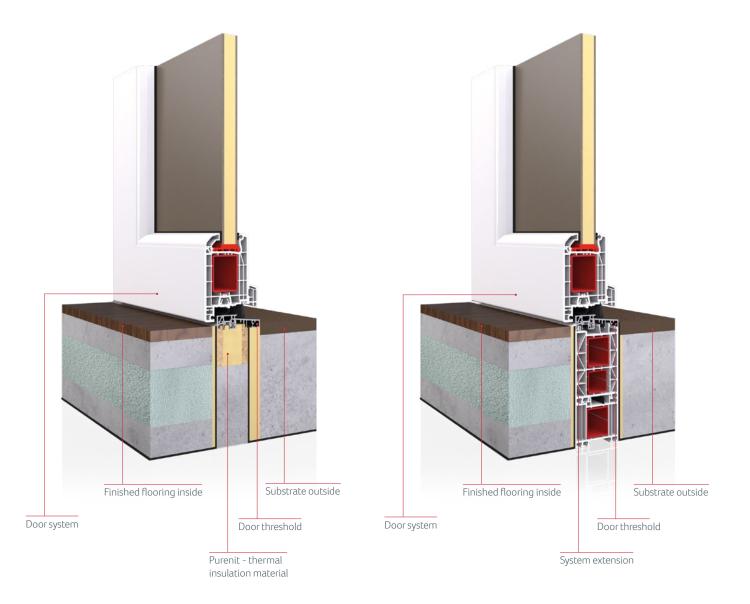

No-threshold external door for construction

- Double magnetic seal in a completely flat threshold
 Levelling with the flooring surface up to 30 mm
 Air permeability class 4 as per DIN EN 12207
 Acoustic insulation coefficient Rw = 43 dB

Substrate outside



Finished flooring inside

Double magnetic seal

Threshold drainage

EU2U

Wide range

Our range of products not only includes doors, but also windows, sliding systems, gates, fences, roller shutters, insect screens. We have earned the trust of millions of customers, domestically and abroad.

With carefully selected components, many years of experience and care for the highest quality, our products meet the best technical specifications.



